

Datasheet

PIXEL BRICK



This multi-purpose spotlight is not much larger than an AX3 but features all our latest technological achievements such as Titan LED Engine, CRMX & wired DMX via PowerBox and direct App control without ART7. Each of its 4 sides includes an airline track and a nifty rail to slide-in mounting accessories which allows a quick connection of several PixelBricks to form clusters and geometrical shapes.









SPECIFICATIONS

20h Wireles

IP65

Ap

Order Code	PB15		
LED Engine	Titan LED Engine		
Colors	RGBMintAmber		
Total LED Power	15W		
Power Draw	12W		
Light Output – 2700k, 3200k, 5500k*	388lm, 450lm, 375lm		
CRI(Ra)/TLCI 3200-6500k*	≥96		
Beam Angle	13°		
Strobe	0 - 25Hz		
Pixel	1		
Battery Lifetime	70 % after 300 cycles		
Battery Runtime	up to 20 hours		
Charging Time (nominal)	5 hrs		
Input Voltage	24VDC		
Input Current	A8.0		
Wired DMX	Yes (via PWB-2-86)		
CRMX Receiver	Built in		
Wireless Frequencies	CRMX 2.4GHz, UHF, Bluetooth		
Range (m/yds)	300/330 (Bluetooth 3/3,3)		
Housing Material	Aluminium		
IP Rating	IP65		
Ambient Temperature (°C/°F)	0° - 40° / 32° - 104°		
Weight (kg/lbs)	1.12 / 2.47		
Dimensions (mm/inches)	91 x 91 x 94 / 3.6 x 3.6 x 3.7		

RF CHARACTERISTICS

*Typical values


Wireless Modules	EU: UHF (863-870MHz)	USA: UHF (917-922.20MHz)	AUS: UHF (922.30-927.50MHz)	SGP: UHF (920.50-924.50MHz)	
Modulation	FHSS	FHSS	FHSS	FHSS	-
ERP (Transmitter)	<25mW	<25mW	<25mW	<25mW	
Channel Count	47	53	53	41	
Wireless Modules	KOR: UHF (917.9-921.5MHz)	RUS: UHF (868.75-869.12MHz)	JPN: UHF (922.80-926.40MHz)	CRMX (2402-2480MHz)	Bluetooth 5.0 LE (2402-2480MHz)
Modulation	FHSS	FHSS	FHSS	FHSS	FHSS
ERP (Transmitter)	<25mW	<25mW	<25mW	-	10mW (BLE)
Channel Count	10	6	19	79	40


BUILT-IN BLUETOOTH AND UHF TRANSMITTER


Connect directly to a PixelBrick via Bluetooth. This master light will revert AsteraApp commands to all other NYX Bulbs and other Astera lights via UHF band.




DRAWINGSWITHOUT BRACKET










WITH BRACKET











SOCKETS, AIRLINE TRACK, THREADS

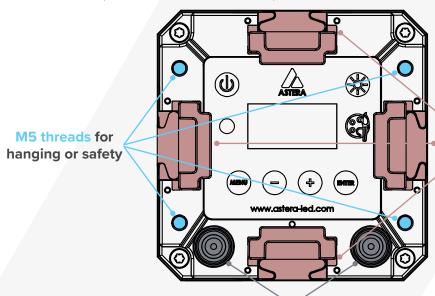




4 Airline Tracks with quick lock for

4 Airline Tracks with quick lock for flexible and safe mounting

Quickly merge several PixelBricks to build clusters and shapes.

ACCESSORIES



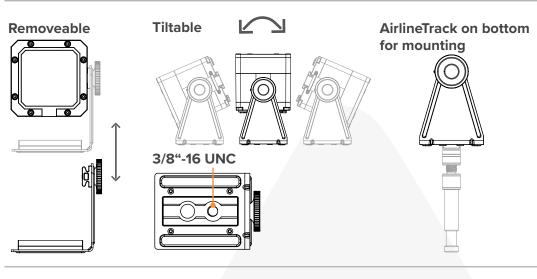













BrickTilt on PixelBrick



Build creative shapes


BrickConnect PB15-BCN





Weight (1pc): 27g / 0.059lbs

Connect your PixelBricks to several shapes














Weight (1pc): 25g / 0.55 lbs


BrickMount on PixelBrick



Mounted on plate



BrickDome



BrickDome on PixelBrick



Filters



FloodFilter 30° PB15-FF

BeamSoftener 17° PB15-BSO







EyeBolt FP1-EBLT





I P





Power/Data Cable 0,2m

PWB-CAB-0.2



ChargingCase

PB15-CHRCSE



Weight (empty): 6.8kg / 15lbs Weight (full): 16.3kg / 36lbs



Dimensions (mm/inch) 541.5 x 400 x 205.5 / 21.3 x 17.44 x 8.1

AccessoryCase PB15-ACCCSE


Weight (empty): 7kg / 15.4lbs Weight (full): 13.3kg / 29.3lbs



Dimensions (mm/inch) 541.5 x 400 x 205.5 / 21.3 x 17.44 x 8.1

CHARGING & CONNECTING

With PowerBox 2x86 (PWB-2-86)

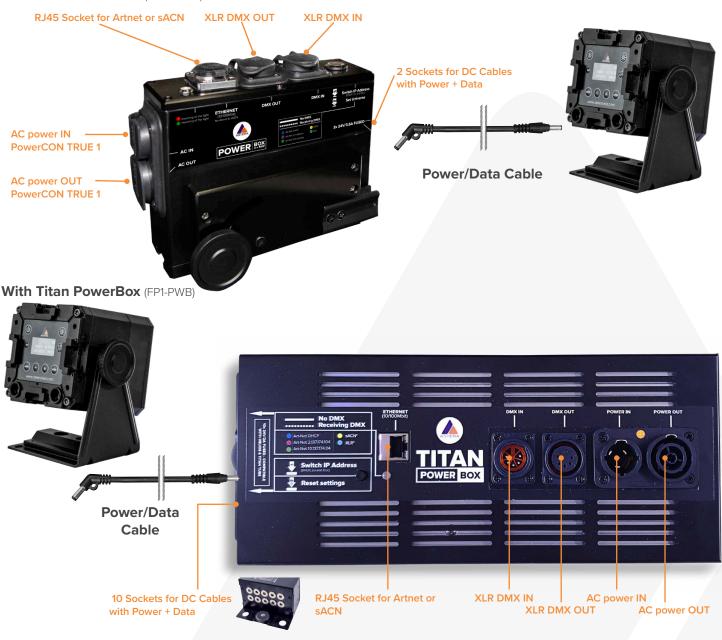

TYPICAL SPECTRAS

